



## 2U Horizontal Ethernet Meter PDU's

### ETHERNET METER (EM)

The Geist Ethernet Meter was designed as an up-time assurance solution for your critical IT equipment. Remote access, real-time monitoring of connected loads and user defined alarm thresholds result in an early warning system for potential circuit overloads. This advanced warnings solution protects against costly downtime.

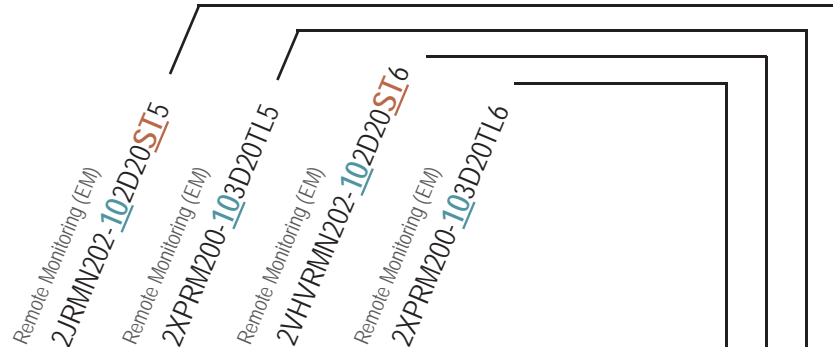

HORIZONTAL / VERTICAL	H	H	H	H
QUANTITY OF INPUTS	1	1	1	1
AMPS	20	30	20	30
VOLTS	125	125	250	250
TOTAL RECEPTACLE QTY	20	20	20	20
RECEPTACLE TYPE / QTY	5-20R / 20	5-20R / 20	6-20R / 20	6-20R / 20
RECEPTACLES PER BREAKER	N/A	10	N/A	10
MAGNETIC CIRCUIT BREAKER / ON-OFF SWITCH WITH INTEGRAL SWITCH GUARD	NO	YES	NO	YES
BREAKER AMPERAGE / QTY	N/A	20 / 2	N/A	20 / 2
BREAKER POLE CONFIGURATION	N/A	SINGLE	N/A	DOUBLE
CURRENT MONITORING - LOCAL & ETHERNET	YES	YES	YES	YES
TOTAL UNIT MONITORING	YES	YES	YES	YES
BREAKER LEVEL MONITORING	N/A	YES	N/A	YES
10' POWER CORD	1	1	1	1
STRAIGHT-BLADE PLUG	5-20P	N/A	6-20P	N/A
TWIST-LOCK PLUG	L5-20P	L5-30P	L6-20P	L6-30P
2U RECESS MOUNTING BRACKETS	YES	YES	YES	YES
DIMENSIONS L	3.39	3.39	3.39	3.39
DIMENSIONS W	17	17	17	17
DIMENSIONS D	6	6	6	6

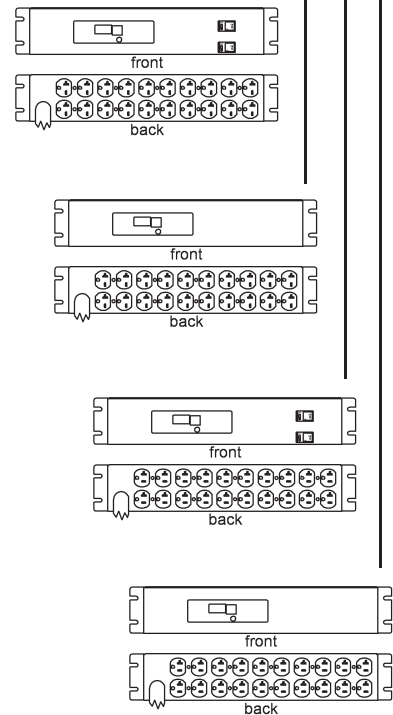

#### MODIFY TO MEET YOUR NEEDS

Cord Length (Feet) <a href="#">02-15</a> (Plug Attached)	
Plug Type: <a href="#">SI</a> = Straight-Blade / <a href="#">TL</a> = Twist-Lock	

- FCC Part 15 Class A
- UL® & C-UL® Listed 60950

SPECIFICATION: +/- 3.5% Accuracy with Full Scale 50/60Hz sine wave input