



## Inline Ethernet Meter

### Local & Remote Current Monitoring

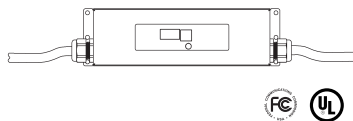

LME-10TC13-10C14S  
 LME-102C19-10C20S  
 LME-101ST5-10ST5S  
 LME-101TL5-10TL5S  
 LME-102ST5-10ST5S  
 LME-102TL5-10TL5S

AMPS	15	20	15	15	20	20
VOLTS	125 / 250	125 / 250	125	125	125	125
PLUG TYPE / RECEPTACLE TYPE	C-14 / C-13	C-20 / C-19	5-15P / 5-15R	L5-15P / L5-15R	5-20P / 5-20R	L5-20P / L5-20R
INPUT / OUTPUT POWER CORDS	10'	10'	10'	10'	10'	10'
DIMENSIONS H (inches)	2	2	2	2	2	2
DIMENSIONS W	12.25	12.25	12.25	12.25	12.25	12.25
DIMENSIONS D	3.5	3.5	3.5	3.5	3.5	3.5

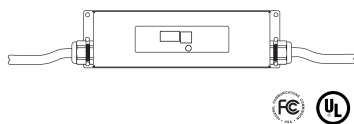

LME-102ST6-10ST6S  
 LME-102TL6-10TL6S  
 LME-102TL21-10TL21S  
 LME-103TL5-10TL5S  
 LME-103TL6-10TL6S  
 LME-103TL21-10TL21S

AMPS	20	20	20 x 3-	30	30	30 x 3-
VOLTS	250	250	120/208 WYE	125	250	120/208 WYE
PLUG TYPE / RECEPTACLE TYPE	6-20P / 6-20R	L6-20P / L6-20R	L21-20P / L21-20R	L5-30P / L5-30R	L6-30P / L6-30R	L21-30P / L21-30R
INPUT / OUTPUT POWER CORDS	10'	10'	10'	10'	10'	10'
DIMENSIONS H (inches)	2	2	2	2	2	2
DIMENSIONS W	12.25	12.25	12.25	12.25	12.25	12.25
DIMENSIONS D	3.5	3.5	3.5	3.5	3.5	3.5


MODIFY TO MEET YOUR NEEDS

Cord Length (Feet) [Q2-15](#)

SPECIFICATION : +/- 3.5% Accuracy with Full Scale 50/60Hz sine wave input

#### FEATURES & BENEFITS

- **Remote current monitoring** - Prevent down-time with early notification of usage exceeding user defined limits
- **Local current monitoring (digital display)** - Instantaneous current feedback ideal for installation & maintenance
- **SNMP traps and alarms** - Integration into SNMP systems for remote notification
- **User-friendly GUI interface** - Quickly locate pertinent information
- **IP address reset button** - Ease of reconfiguration upon move or loss of IP address
- **Accessible via any web browser** - Simple installation, No external software to load or lose

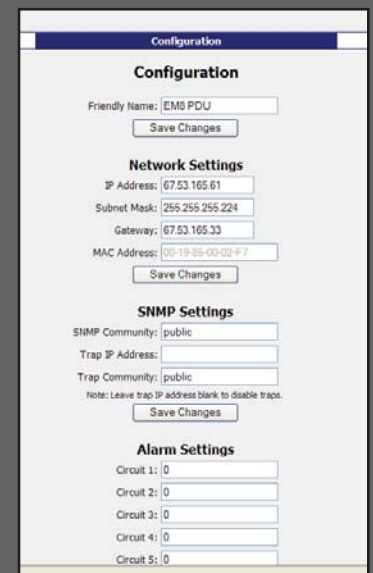

Partial Screen Shot