

# GEIST

## SWITCHED (RCM-O DELTA) PDUs

Geist Switched PDUs provide real-time monitoring and alarming of power variables and environmental conditions, while allowing IT managers to remotely respond to threshold alarms or unresponsive equipment. Our new on-board display offers a convenient local view of power and environmental data. Geist PDUs help ensure continual and uninterrupted power to your data center at a cost-effective price point.



- All 3 phase and multi-input units have labeling for easy identification and load balancing
- UL® & c-UL® Listed 60950
- FCC Part 15 Class A

RCMW248-103IK3TL15-OD

RCMW248-105IK3CS15-35-OD

RCMB248-105H6CS15-OD

RCMB248-106H6PS15-OD




Now Featuring a  
Local Display &  
Serial Port

LINE DRAWING	1	1	2	2
AMPS	30 x 3~	35 x 3~	50 x 3~	60 x 3~
VOLTS	208 Delta	208 Delta	208 Delta	208 Delta
OUTPUT VOLTAGE FOR 3 PHASE INPUT UNITS	208	208	208	208
TOTAL RECEPTACLE QTY	24	24	24	24
RECEPTACLE TYPE / QTY	C-13 / 21	C-13 / 21	C-13 / 18	C-13 / 18
RECEPTACLES PER BREAKER & PHASE COMBINATION	7	7	N/A	N/A
RECEPTACLES PER BREAKER	N/A	N/A	3	3
RECEPTACLES PER PHASE COMBINATION	N/A	N/A	6	6
RECEPTACLE TYPE / QTY	C-19 / 3	C-19 / 3	C-19 / 6	C-19 / 6
RECEPTACLES PER BREAKER & PHASE COMBINATION	1	1	N/A	N/A
RECEPTACLES PER PHASE COMBINATION	N/A	N/A	2	2
MAGNETIC CIRCUIT BREAKER / ON-OFF SWITCH WITH INTEGRAL GUARD	YES	YES	YES	YES
BREAKER AMPERAGE / QTY	20 / 3	20 / 3	20 / 6	20 / 6
BREAKER POLE CONFIGURATION	DOUBLE	DOUBLE	DOUBLE	DOUBLE
POWER MONITORING - AMPS, VOLTS, POWER FACTOR, KW HOURS	YES	YES	YES	YES
MONITORING	PHASE (X,Y,Z)	PHASE (X,Y,Z)	PHASE (X,Y,Z)	PHASE (X,Y,Z)
ENVIRONMENTAL MONITORING - REMOTE SENSOR JACKS	2	2	2	2
ETHERNET & SERIAL (RS232) CONNECTIONS	YES	YES	YES	YES
BUILT-IN SCROLLING DIGITAL DISPLAY	YES	YES	YES	YES
REMOTE POWER SWITCHING AT THE RECEPTACLE LEVEL	YES	YES	YES	YES
10' POWER CORD	1	1	1	1
TWIST-LOCK PLUG	L15-30P	N/A	N/A	N/A
CALIFORNIA STYLE PLUG	N/A	50A, 250V 3P / 4W	50A, 250V 3P / 4W	N/A
IEC 60309 PIN & SLEEVE CONNECTOR	N/A	N/A	N/A	60A, 250V 3P / 4W
FULL-LENGTH VERTICAL MOUNTING BRACKET	YES	YES	YES	YES
TOOLLESS MOUNTING HARDWARE - CENTER TO CENTER SPACING (INCHES)	61.25 & 64.75	61.25 & 64.75	61.25 & 64.75	61.25 & 64.75
DIMENSIONS L (INCHES)	72	72	66.25	66.25
DIMENSIONS W	2.5	2.5	4	4
DIMENSIONS D	2.25	2.25	3.45	3.45

MODIFY TO MEET YOUR NEEDS

Cord Length (Feet) 02-15 (Plug Attached)

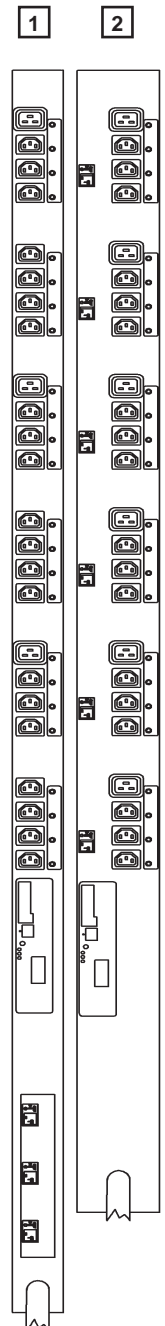

# GEIST

## SWITCHED ULTRA (RCU-O DELTA) PDUs

Geist Switched Ultra PDUs specialize in outlet level current and kWatt-Hour monitoring. Site managers are able to remotely monitor equipment status, manage productivity and shut-down ghost servers. Our new on-board display provides a local view of power and environmental data. Geist PDUs offer the most current in-demand feature sets at attractive price points.



RCUW248-103IK3TL15-OD

RCUW248-105IK3CS15-35-OD

RCUB248-105IH6CS15-OD


RCUB248-106IH6PS15-OD

- All 3 phase and multi-input units have labeling for easy identification and load balancing
- UL® & c-UL® Listed 60950
- FCC Part 15 Class A



Now Featuring a Local Display & Serial Port

LINE DRAWING	1	1	2	2
AMPS	30 x 3-	35 x 3-	50 x 3-	60 x 3-
VOLTS	208 Delta	208 Delta	208 Delta	208 Delta
OUTPUT VOLTAGE FOR 3 PHASE INPUT UNITS	208	208	208	208
TOTAL RECEPTACLE QTY	24	24	24	24
RECEPTACLE TYPE / QTY	C-13 / 21	C-13 / 21	C-13 / 18	C-13 / 18
RECEPTACLES PER BREAKER & PHASE COMBINATION	7	7	N/A	N/A
RECEPTACLES PER BREAKER	N/A	N/A	3	3
RECEPTACLES PER PHASE COMBINATION	N/A	N/A	6	6
RECEPTACLE TYPE / QTY	C-19 / 3	C-19 / 3	C-19 / 6	C-19 / 6
RECEPTACLES PER BREAKER & PHASE COMBINATION	1	1	N/A	N/A
RECEPTACLES PER BREAKER	N/A	N/A	1	1
RECEPTACLES PER PHASE COMBINATION	N/A	N/A	2	2
MAGNETIC CIRCUIT BREAKER / ON-OFF SWITCH WITH INTEGRAL GUARD	YES	YES	YES	YES
BREAKER AMPERAGE / QTY	20 / 3	20 / 3	20 / 6	20 / 6
BREAKER POLE CONFIGURATION	DOUBLE	DOUBLE	DOUBLE	DOUBLE
POWER MONITORING - AMPS, VOLTS, POWER FACTOR, KW HOURS	YES	YES	YES	YES
MONITORING	PHASE (X,Y,Z)	PHASE (X,Y,Z)	PHASE (X,Y,Z)	PHASE (X,Y,Z)
OUTLET LEVEL MONITORING	AMPS, WATTS, KW HOURS	AMPS, WATTS, KW HOURS	AMPS, WATTS, KW HOURS	AMPS, WATTS, KW HOURS
OUTLET GROUP MONITORING	VOLTS	VOLTS	VOLTS	VOLTS
ENVIRONMENTAL MONITORING - REMOTE SENSOR JACKS	2	2	2	2
ETHERNET & SERIAL (RS232) CONNECTIONS	YES	YES	YES	YES
BUILT-IN SCROLLING DIGITAL DISPLAY	YES	YES	YES	YES
REMOTE POWER SWITCHING AT THE RECEPTACLE LEVEL	YES	YES	YES	YES
10' POWER CORD	1	1	1	1
TWIST-LOCK PLUG	L15-30P	N/A	N/A	N/A
CALIFORNIA STYLE PLUG	N/A	50A, 250V 3P / 4W	50A, 250V 3P / 4W	N/A
IEC 60309 PIN & SLEEVE CONNECTOR	N/A	N/A	N/A	60A, 250V 3P / 4W
FULL-LENGTH VERTICAL MOUNTING BRACKET	YES	YES	YES	YES
TOOLLESS MOUNTING HARDWARE - CENTER TO CENTER SPACING (INCHES)	61.25 & 64.75	61.25 & 64.75	61.25 & 64.75	61.25 & 64.75
DIMENSIONS L (INCHES)	72	72	66.25	66.25
DIMENSIONS W	2.5	2.5	4	4
DIMENSIONS D	2.25	2.25	3.45	3.45

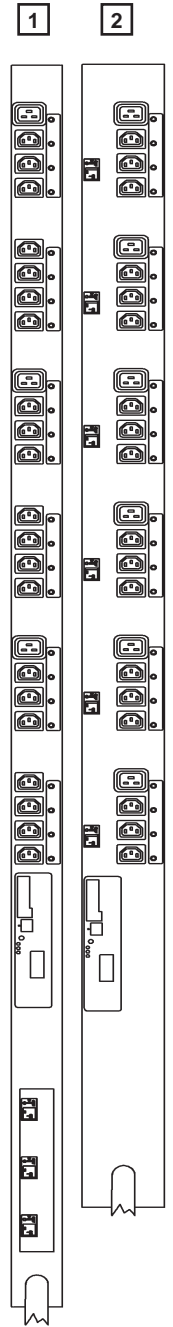

MODIFY TO MEET YOUR NEEDS

Cord Length (Feet) [02-15](#) (Plug Attached)

# GEIST

## POWER MONITORING (RCX DELTA) PDUs

Geist Power Monitoring PDUs provide on-site managers with a comprehensive remote view of their data center's power utilization. Our new on-board display offers quick access to their data centers' Amps, Volts, Real Power, Apparent Power, Power Factor and kWatt-Hours. Monitoring of the most critical variables ensures maximum uptime and helps track energy efficiencies.




- All 3 phase and multi-input units have labeling for easy identification and load balancing
- UL® & c-UL® Listed 60950
- FCC Part 15 Class A

RCXB248-103D20TL15-D  
 RCXB308-103IN6TL15-D  
 RCXW368-105IT6CS15-35-D  
 RCXW308-105IN6CS15-D  
 RCXW308-106IN6PS15-D



Now Featuring a Local Display & Serial Port

LINE DRAWING	1	2	3	4	4
AMPS	30 x 3-	30 x 3-	35 x 3-	50 x 3-	60 x 3-
VOLTS	208 Delta	208 Delta	208 Delta	208 Delta	208 Delta
OUTPUT VOLTAGE FOR 3 PHASE INPUT UNITS	208	208	208	208	208
TOTAL RECEPTACLE QTY	24	30	36	30	30
RECEPTACLE TYPE / QTY	6-20R / 24	C-13 / 24	C-13 / 30	C-13 / 24	C-13 / 24
RECEPTACLES PER BREAKER & PHASE COMBINATION	8	8	10	N/A	N/A
RECEPTACLES PER BREAKER	N/A	N/A	N/A	4	4
RECEPTACLES PER PHASE COMBINATION	N/A	N/A	N/A	8	8
RECEPTACLE TYPE / QTY	N/A	C-19 / 6	C-19 / 6	C-19 / 6	C-19 / 6
RECEPTACLES PER BREAKER & PHASE COMBINATION	N/A	2	2	N/A	N/A
RECEPTACLES PER BREAKER	N/A	N/A	N/A	1	1
RECEPTACLES PER PHASE COMBINATION	N/A	N/A	N/A	2	2
MAGNETIC CIRCUIT BREAKER / ON-OFF SWITCH WITH INTEGRAL GUARD	YES	YES	YES	YES	YES
BREAKER AMPERAGE / QTY	20 / 3	20 / 3	20 / 3	20 / 6	20 / 6
BREAKER POLE CONFIGURATION	DOUBLE	DOUBLE	DOUBLE	DOUBLE	DOUBLE
POWER MONITORING - AMPS, VOLTS, POWER FACTOR, KW HOURS	YES	YES	YES	YES	YES
MONITORING	PHASE (X,Y,Z)	PHASE (X,Y,Z)	PHASE (X,Y,Z)	PHASE (X,Y,Z)	PHASE (X,Y,Z)
ENVIRONMENTAL MONITORING - REMOTE SENSOR JACKS	2	2	2	2	2
ETHERNET & SERIAL (RS232) CONNECTIONS	YES	YES	YES	YES	YES
BUILT-IN SCROLLING DIGITAL DISPLAY	YES	YES	YES	YES	YES
10' POWER CORD	1	1	1	1	1
TWIST-LOCK PLUG	L15-30P	L15-30P	N/A	N/A	N/A
CALIFORNIA STYLE PLUG	N/A	N/A	50A, 250V 3P / 4W	50A, 250V 3P / 4W	N/A
IEC 60309 PIN & SLEEVE CONNECTOR	N/A	N/A	N/A	N/A	60A, 250V 3P / 4W
FULL-LENGTH VERTICAL MOUNTING BRACKET	YES	YES	YES	YES	YES
TOOLLESS MOUNTING HARDWARE - CENTER TO CENTER SPACING (INCHES)	61.25 & 64.75	61.25 & 64.75	61.25 & 64.75	61.25 & 64.75	61.25 & 64.75
DIMENSIONS L (INCHES)	66.25	66.25	70	72	72
DIMENSIONS W	2	2	2	2.3	2.3
DIMENSIONS D	2.25	2.25	2.25	3.45	3.45

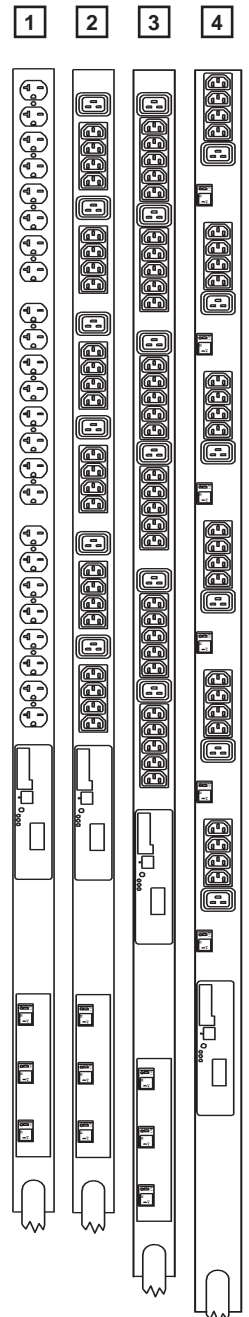

MODIFY TO MEET YOUR NEEDS

Cord Length (Feet) [02-15](#) (Plug Attached)